## CONSUMABLES

## For **CPM-100HG5**

STANDARD TAPE ROLLS 10meters/roll

Code	Description	Color	
IL90667	SL-S111N2	Black	
IL90668	SL-S112N2	White	
IL90669	SL-S113N2	Red	
IL90714	SL-S114N2	Blue	
IL90715	SL-S115N2	Yellow	
IL90716	SL-S116N2	Green	
IL90717	SL-S117N2	Pink	
IL90718	SL-S118N2	Orange	
IL90727	SL-S119N2	Sky Blue	
IL90728	SL-S120N2	Gray	
IL90729	SL-S121N2	Lettuce Green	
IL90736	SL-S123N2	Cobalt Blue	
IL90737	SL-S124N2	Navy Blue	
IL90738	SL-S125N2	Amethyst	
IL90739	SL-S126N2	Brown	

PREMIUM TAPE ROLLS 15meters/roll Glossy Finish

Code	Description	Color
IL97401	SL-BS111N	Black
IL97402	SL-BS112N	White
IL97403	SL-BS113N	Red
IL97404	SL-BS114N	Blue
IL97405	SL-BS115N	Yellow
IL97406	SL-BS116N	Green
IL97410	SL-BS110N	Clear
IL97420	SL-BS120N	Silver

SPOT COLOR INK RIBBONS 55meters/roll

Code	Description	Color
IL90744	SL-R101T	Black-C
IL92205	SL-R122TH	Superwhite
IL90746	SL-R103T	Red-C
IL90747	SL-R104T	Blue-C
IL90748	SL-R105T	Dark Blue-C
IL90749	SL-R106T	Dark Green-C
IL90750	SL-R107T	Green-C
IL90751	SL-R108T	Yellow-C
IL90753	SL-R112T	Orange-C

PREMIUM "EASY-WEEDING" TAPE ROLLS 15meters/roll Glossy Finish

	Code	Description	Color	
IL9	2714	SL-S111GN	Black	
IL9	2715	SL-S112GN	White	
IL9	2716	SL-S113GN	Red	
IL9	2717	SL-S114GN	Blue	
IL9	2718	SL-S115GN	Yellow	()
IL9	2719	SL-S116GN	Green	
IL9	2720	SL-S110GN	Clear	
IL9	2722	SL-S118GN	Orange	
IL9	2721	SL-S126GN	Brown	
IL9	2723	SL-S109GN	Gold	
IL9	2724	SL-S108GN	Silver	

#### SPECIAL TAPE ROLLS

Code	Description	Color	Material
IL92725	SL-S163N	Hairlined Silver	PET
IL92726	SL-S164N	Hairlined Gold	PET
IL91186	SL-S153N	White	PET
IL91187	SL-S154N	Matt Silver	PET
IL90782	SL-S141N	White	Reflective
IL99601	SL-S100AP	Clear	Not for print
IL99367	SL-L100 FL	Clear	Laminate only
IL99366	SL-L100 UV	Clear	Laminate only

■PROCESS COLOR INK RIBBONS 55meters/roll

Code	Description	Color
IL92222	SL-R115T	Process Cyan
IL92223	SL-R116T	Process Magenta
IL92224	SL-R117T	Process Yellow
IL92225	SL-R118T	Process Black

Process color ribbons are intended for the use with MAX white tape rolls, such as SL-S112N2 White.



SL-R101T Black-C and SL-R116T YMCK-M ribbon, are applicable with CPM-100HG5

GHS Label

SL-S112GN WHITE TAPE BOLL

SL-R101T BLACK-C INK RIBBON

SL-R103T RED-C INK RIBBON

## -ull Col

Only "C" type ink ribbons and CMYK ribbons, such as

#### Examples of the custom made labels by the Premium "Easy-Weeding" Tape Rolls.

#### Product Label



SL-S163N PET HL SILVER TAPE ROLL SL-R101T BLACK-C INK RIBBON



SL-S115GN YELLOW TAPE ROLL SL-R101T BLACK-C INK RIBBON



SL-R101T BLACK-C INK RIBBON



## SIGN & LABEL

### PRINTING & CUTTING MACHINE

# **Kepop**

### **CPM-100HG5**

100mm Wide Label Printer 400 dpi Multi & Full Color Model

## Save Time Save Money Enhance Workplace Safety **Improve Productivity**







MAX CO..LTD. 6-6,NIHONBASHI,HAKOZAKI-CHO,CHUO-KU,TOKYO,JAPAN PHONE: 81-3-3669-8131 FAX: 81-3-3669-7104 http://wis.max-ltd.co.jp/int/bepopregi/index2.php





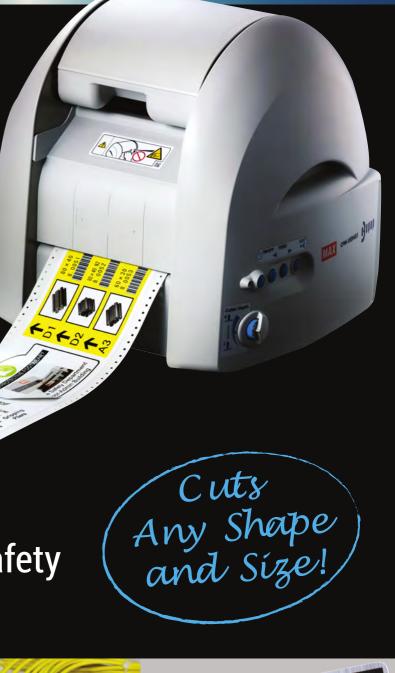

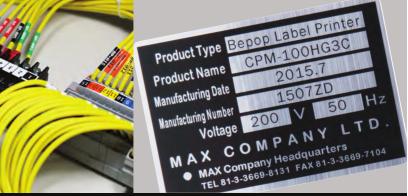







### **Dedicated Software Included**

#### USB and Ethernet connection to your PC



#### Templates & Symbols

Bepop PC-EX software includes 1,400 templates and symbols to help create your industrial standard signage easily and guickly.









Bepop PC-EX software makes it possible to import the existing data from your PC so that you can use the data to create label design.

#### Database in CSV format

CAD drawing data in DXF format Image data in JPG, BMP, GIF, WMF, PNG or TIFF format Document data in Excel, Word, Powerpoint

#### Print in Full Color with CMYK ink ribbon



With using the CMYK process color ink ribbons, you can import and print any photos and logos on the tape roll in 400 dpi high resolution.





#### **Specifications**

4 color dots are used to create full color images

<b>_</b>	
DIMENSIONS	330mm (W) x 320mm (D) x 320mm (H)
WEIGHT	9 kg
PRINT TECHNOLOGY	Thermal Transfer
COLOR PRINTING CAPABILITY	Full-Color and Multi-Color
MAXIMUM OUTPUT RANGE	100 mm x 2000 mm
PRINT RESOLUTION	400 dpi
PRINTING SPEED	25 mm/sec.
CUTTING SPEED	Maximum 120 mm/sec.
CUTTING FUNCTION	Free-cut (Shapes, Letters, Bordering)
CUTTING RESOLUTION	0.025 mm inch/step
CONNECTIVITY	USB2.0 Full Speed, LAN 10base T/100base TX
OPERATING TEMPERATURE	10-35°C (50-95°F)
OPERATING HUMIDITY	35-80%, non-condensing
POWER SUPPLY VOLTAGE	AC 100-240V