

# Marking Tubes, Labels and more!

# MAX

## Electronic Lettering Machine

# LETATWIN

## LM-550A/PC



### Professional choice for your cable marking job!

**NEW MODEL**



- The class's fastest printing speed!
- Versatile printing capability! (Tube  $\phi$ 1.5~8.0mm)
- Dual USB connectivity with PC :  
USB memory and cable!

Comes with plastic carry case



The dedicated "LETATWIN PC EDITOR" application software included.



\*For the availability of European style marking media, please contact our distributor.



# DEVELOPED FOR MAXIMIZING CABLE MARKING JOB PRODUCTIVITY



## Long consumable roll length

LM-550A/PC adopts the new dedicated consumables which have long roll length. Long roll length saves reloading time.

|                                  |            |
|----------------------------------|------------|
| LM-IR300B for LM-390A/PC         | 50 meters  |
| LM-IR50B for LM-550A/PC          | 110 meters |
| LM-TP3xxx for LM-390A/PC         | 8 meters   |
| LM-TP5xxW (White) for LM-550A/PC | 16 meters  |

\*LM-TP5xxT (Transparent) and TP5xxY (Yellow) remain as 8meters.

## High-speed marking


LM-550A/PC has an enhanced feeding system that provides you with marking speed at 40mm/second. LM-550A/PC can make approx 52pcs of 20mm-length tube per minute.

| For marking on Tube | Marking time |                          |
|---------------------|--------------|--------------------------|
| LM-390A/PC          | 100          |                          |
| MAX previous model  |              |                          |
| LM-550A/PC          | 88           | <b>Saving time 12%!!</b> |

## Maximum 250,000 characters built-in large memory storage for more files

## Easy access from your PC with USB

LM-550A/PC features USB port for direct connection with Windows personal computer, as well as USB memory slot for off-the-line data exchange with windows personal computer by "LETATWIN PC EDITOR".

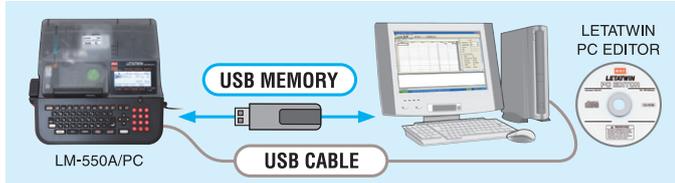

## SPECIFICATIONS

| ITEMS                                 | CONTENTS  |
|---------------------------------------|---|
| Name                                  | MAX ELECTRONIC LETTERING MACHINE LM-550A/PC   |
| Dimensions                            | 295 (W)×293 (D)×94 (H) mm   |
| Weight                                | 2.4kg   |
| Printing method                       | Thermal transfer method (300dpi)  |
| Display                               | LCD dot matrix : 64×160 Pixel (Backlit)   |
| Printing speed                        | 40mm/s (Standard) 20mm/s (Low temperature mode)   |
| Maximum Printing length               | Tube : 20m, Tape : 5m<br>By multiple copy printing, maximum 30copies, upto Tube ; 100m, Tape ; 7m |
| Maximum number of characters to input | 5,000 characters per file   |
| Character size                        | 1.3, 2, 3, 4, 6mm height  |
| Usable tube                           | φ1.5mm ~ 8.0mm (PVC tube)<br>φ2.0mm ~ 6.5mm (Heat Shrinkable tube)                                |
| Usable tape                           | Width 5, 9, 12mm (Max genuine tape)   |
| Tube cutting method                   | Auto half cut, manual full cut  |
| Internal memory                       | 250,000 characters (Maximum 50 files)   |
| External memory                       | USB memory  |
| Interface                             | USB 2.0 full speed  |
| Power supply                          | DC12V, 3.0A <small>Use only specified AC Adapter (100V~240V) included in the package</small>      |
| Power consumption                     | Max 30W   |
| Operating environment                 | 10°C to 35°C  |



**PC REQUIREMENTS** For Windows 10 / 8.1 / 8 / 7 operating systems. Windows® is a registered trademark of Microsoft Corporation(US) in U.S.A. or other countries.

The specifications and design of the products in this catalogue will be subject to change without advance notice due to our continuous efforts to improve the quality of our products.

## Versatile marking capability

Various marking media and sizes

- φ1.5~φ8.0mm PVC tubes
- φ2.0~φ6.5mm Heat Shrinkable tubes

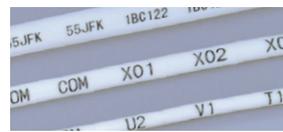

- 5mm/9mm/12mm wide MAX dedicated tapes
- I.D. plates
- Oval tubes

## Large and backlit LCD display


Backlit LCD display makes your confirmation of input contents easy, even if you work in dim jobsite.



## The pitch can be set up to maximum 60mm.

Marking on tape : 4 up to 60mm

Marking on tube : 10 up to 60mm \*(Auto pitch function is available for more than 60mm)\*

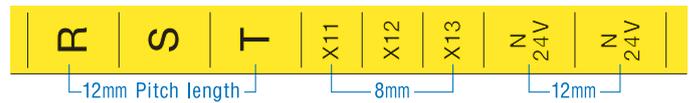

## Economical refill-type ink ribbon.



### CONSUMABLES

#### INK RIBBON CASE

LM-RC500

20PCS./CTN

#### UL RECOGNIZED TUBE

1ROLL/BOX

- LM-TU332N2 WHITE φ3.2mm×100m/ROLL
- LM-TU336N2 WHITE φ3.6mm×100m/ROLL
- LM-TU342N2 WHITE φ4.2mm×80m/ROLL
- LM-TU352N2 WHITE φ5.2mm×80m/ROLL

#### ECONOMICAL INK RIBBON REFILLS

10 ROLLS/BOX

LM-IR50B (BLACK) 110m/ROLL

#### MAX HIGH QUALITY TUBE

1ROLL/BOX

- LM-TU432L WHITE φ3.2mm×200m/ROLL
- LM-TU436L WHITE φ3.6mm×200m/ROLL
- LM-TU442L WHITE φ4.2mm×200m/ROLL
- LM-TU452L WHITE φ5.2mm×135m/ROLL
- LM-TU464L WHITE φ6.4mm×100m/ROLL
- LM-TU480L WHITE φ8.0mm×100m/ROLL

#### INK RIBBON REFILLS FOR HEAT SHRINKABLE TUBE

10 ROLLS/BOX  
(For φ1.5~2.0mm tubes, the dedicated attachment (standard accessory) is required.)

LM-IR50P (BLACK) 110m/ROLL

LM-IR50W (WHITE) 70m/ROLL

#### TAPE CASSETTE

10PCS./BOX

- LM-TP505W (WHITE) 5mm(W)×16m(L)/PC
- LM-TP505Y (YELLOW) 5mm(W)×8m(L)/PC
- LM-TP505T (TRANSPARENT) 5mm(W)×8m(L)/PC
- LM-TP509W (WHITE) 9mm(W)×16m(L)/PC
- LM-TP509Y (YELLOW) 9mm(W)×8m(L)/PC
- LM-TP509T (TRANSPARENT) 9mm(W)×8m(L)/PC
- LM-TP512W (WHITE) 12mm(W)×16m(L)/PC
- LM-TP512Y (YELLOW) 12mm(W)×8m(L)/PC



## MAX CO.,LTD.

6-6, NIHONBASHI, HAKOZAKI-CHO, CHUO-KU, TOKYO, JAPAN  
PHONE: 81-3-3669-8131 FAX: 81-3-3669-7104  
Web: <http://www.max-ltd.co.jp/int/>

Distributor: